


## Introduction:-

This Hydroelectric lift works with 3 Phase (1 kw) power pack which consumes Electric power for lifting time only. It does not require Compressed Air so it does not disturb your Pneumatic working system. It is very economically designed and hence suits every Dealer. Its look is very aesthetic as such makes your work place beautiful. It works very smoothly and trouble free. One power can be used with 2/3/4 lifts as per the option you purchased.

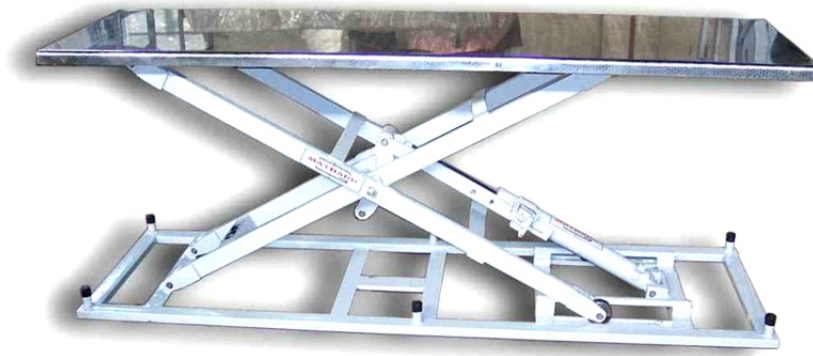

## Specifications:-

Type	Hydro Electric – Scissor type
Frame	Mild steel (Rectangular) tube L x W = 1950 x 555 mm
Top Frame	Mild steel Rectangular Tubular L x W = 1950 x 555mm
Min closing height	110 mm (it is our specialty)
Max Opening height	740 mm
Paint	Powder Coating, Muncil Grey
Top	SS sheet or M.S sheet
Power	Three phase electric supply (single phase optional)
Operation	Wall switch of solenoid valve for up and down
Power Pack	Hydro-electric 1 HP, 3 Phase motor, solenoid Control Power Pack. For 2 Lift, 3 Lift or 4 Lift
Safety Locking	Mechanical locking
Lifting Capacity	One Bike (Approx 200 Kg)
Installation	Flushed into Trench or on floor
Non Trench installation	Extra Ramps are available
Dimensions	1950 x 555 x 110 (mm)
Downing Speed	Variable

## MATHARU ENTERPRISES